



POLYCAB

3 CORE FLAT SUBMERSIBLE CABLES

Satish Enterprise Pvt. Ltd.

Authorised Distributors




POLYCAB

Sales Off:

301, Elphinstone House,
Opp. Sterling Cinema,
17, Murzban Road,
Mumbai - 400 001
022 2207 8520 / 6434/ 35
99207 23289
022 2207 1469
office@satishent.com /
satishent@mtnl.net.in

E-mail:



POLYCAB SPECIAL 3 x 2.5 SQ MM 1100V IS : 694  CML -7829495 POLYCAB DAMAN

POLYCAB 3 x 2.5 SQ MM 1100V IS : 694  CML -7829495 POLYCAB DAMAN

ISO
9001:2008

ISO
14001:2004

OHSAS
18001:2007



CM/L - 7829495

3 CORE FLAT CABLES FOR SUBMERSIBLE PUMP MOTORS


'Polycab Special' 3 Core Flat Cables are manufactured for critical space requirement, protection against indefinite immersion in water under specified conditions, protection against rain-water and against ingress of small solid foreign bodies.

'Polycab Special' 3 Core Flat Cables are produced from best quality electrolytic copper, which is drawn, annealed on-line and bunched on automatic machines to ensure flexibility and uniform resistance. The conductors are insulated with a special grade of PVC on sophisticated co-extrusion lines. Outer sheath consists of highly abrasion resistant PVC compound impervious to grease, oil and water etc.

'POLYCAB SPECIAL' – 3 Core Flat Cables (as per IS 694 : 1990 – ISI marked)

Conductor		Insulation		Sheath		Conductor Resistance @ 20° C (Max.) Ohms/km	Current Carrying Capacity @40° C Amps
Area (Nom.) Sq. mm	No/dia. of strands mm	Thickness (Nom.) mm	Overall dimensions				
			Thickness (Nom.) mm	Size (Approx.) (W x T) mm			
1.5	22/0.3	0.8	1.1	11.6 x 5.5	12.10	16	
2.5	36/0.3	0.9	1.2	13.9 x 6.4	7.41	22	
4.0	56/0.3	1	1.3	16.1 x 7.1	4.95	29	

Note : Insulation thickness, Sheath thickness and Overall Dimensions given in this table are nominal values. The strand diameter is nominal. However, Construction of the conductor is designed to satisfy the requirement of conductor resistance as per IS 8130 :1984.

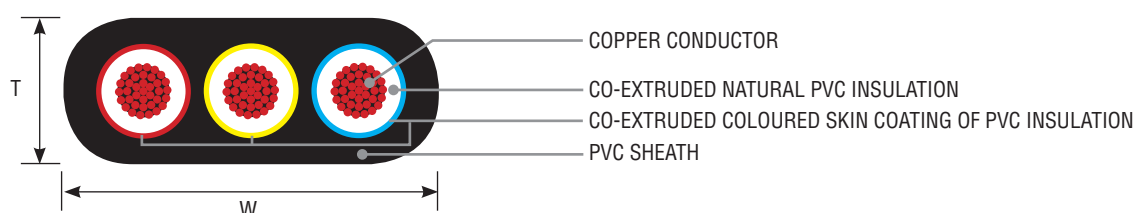

'POLYCAB SPECIAL' – 3 Core Flat Cables (generally conforming to IS : 694)

Conductor		Insulation		Sheath		Conductor Resistance @ 20° C (Max.) Ohms/km	Current Carrying Capacity @40° C Amps
Area (Nom.) Sq. mm	No/dia. of strands mm	Thickness (Nom.) mm	Overall dimensions				
			Thickness (Nom.) mm	Size (Approx.) (W x T) mm			
6	84/0.3	1.1	1.4	18.6 x 8.0	3.30	37	
10	80/0.4	1.3	1.6	23.4 x 10.0	1.91	51	
16	126/0.4	1.4	1.8	27.0 x 11.4	1.21	68	
25	196/0.4	2	2.2	35.4 x 15.0	0.78	86	
35	276/0.4	2.1	2.2	39.3 x 16.3	0.554	110	
50	396/0.4	2.2	2.4	45.7 x 18.5	0.386	145	

Note : 3 Core x 70 sq. mm & 3 Core x 95 sq. mm Flat Cables are available on request

'POLYCAB' – 3 Core Flat Cables (as per IS 694 : 1990 – ISI marked)

'Polycab' 3 Core Flat Cables are having the same features of 'Polycab Special' Submersible Cables as given above. These are having minimum insulation and sheathing thicknesses as specified in the IS 694 : 1990.

Conductor		Insulation		Sheath		Conductor Resistance @ 20° C (Max.) Ohms/km	Current Carrying Capacity @40° C Amps
Area (Nom.) Sq. mm	No/dia. of strands mm	Thickness (Nom.) mm	Core dia. (Nom.) mm	Overall dimensions			
				Thickness (Nom.) mm	Size (Approx.) (W x T) mm		
1.5	22/0.3	0.6	2.8	0.9	11.0 x 5.0	12.10	16
2.5	36/0.3	0.7	3.4	1.0	13.0 x 6.0	7.41	22
4.0	56/0.3	0.8	4.1	1.0	15.3 x 6.7	4.95	29



POLYCAB WIRES PVT. LTD.

Polycab House, 771, Mogul Lane, Mahim (W), Mumbai 400 016, India.

Tel.: +91 22 2432 7070-74 • Fax: +91 22 2432 7075

E-Mail : info@polycab.com • www.polycab.com

BUY POLYCAB BUY PEACE OF MIND

Satish Enterprise Pvt. Ltd.

Authorised Distributors



Sales Off:

301, Elphinstone House,
Opp. Sterling Cinema,
17, Murzban Road,
Mumbai - 400 001



022 2207 8520 / 6434/ 35



99207 23289



022 2207 1469

E-mail:

office@satishent.com /
satishent@mtnl.net.in